


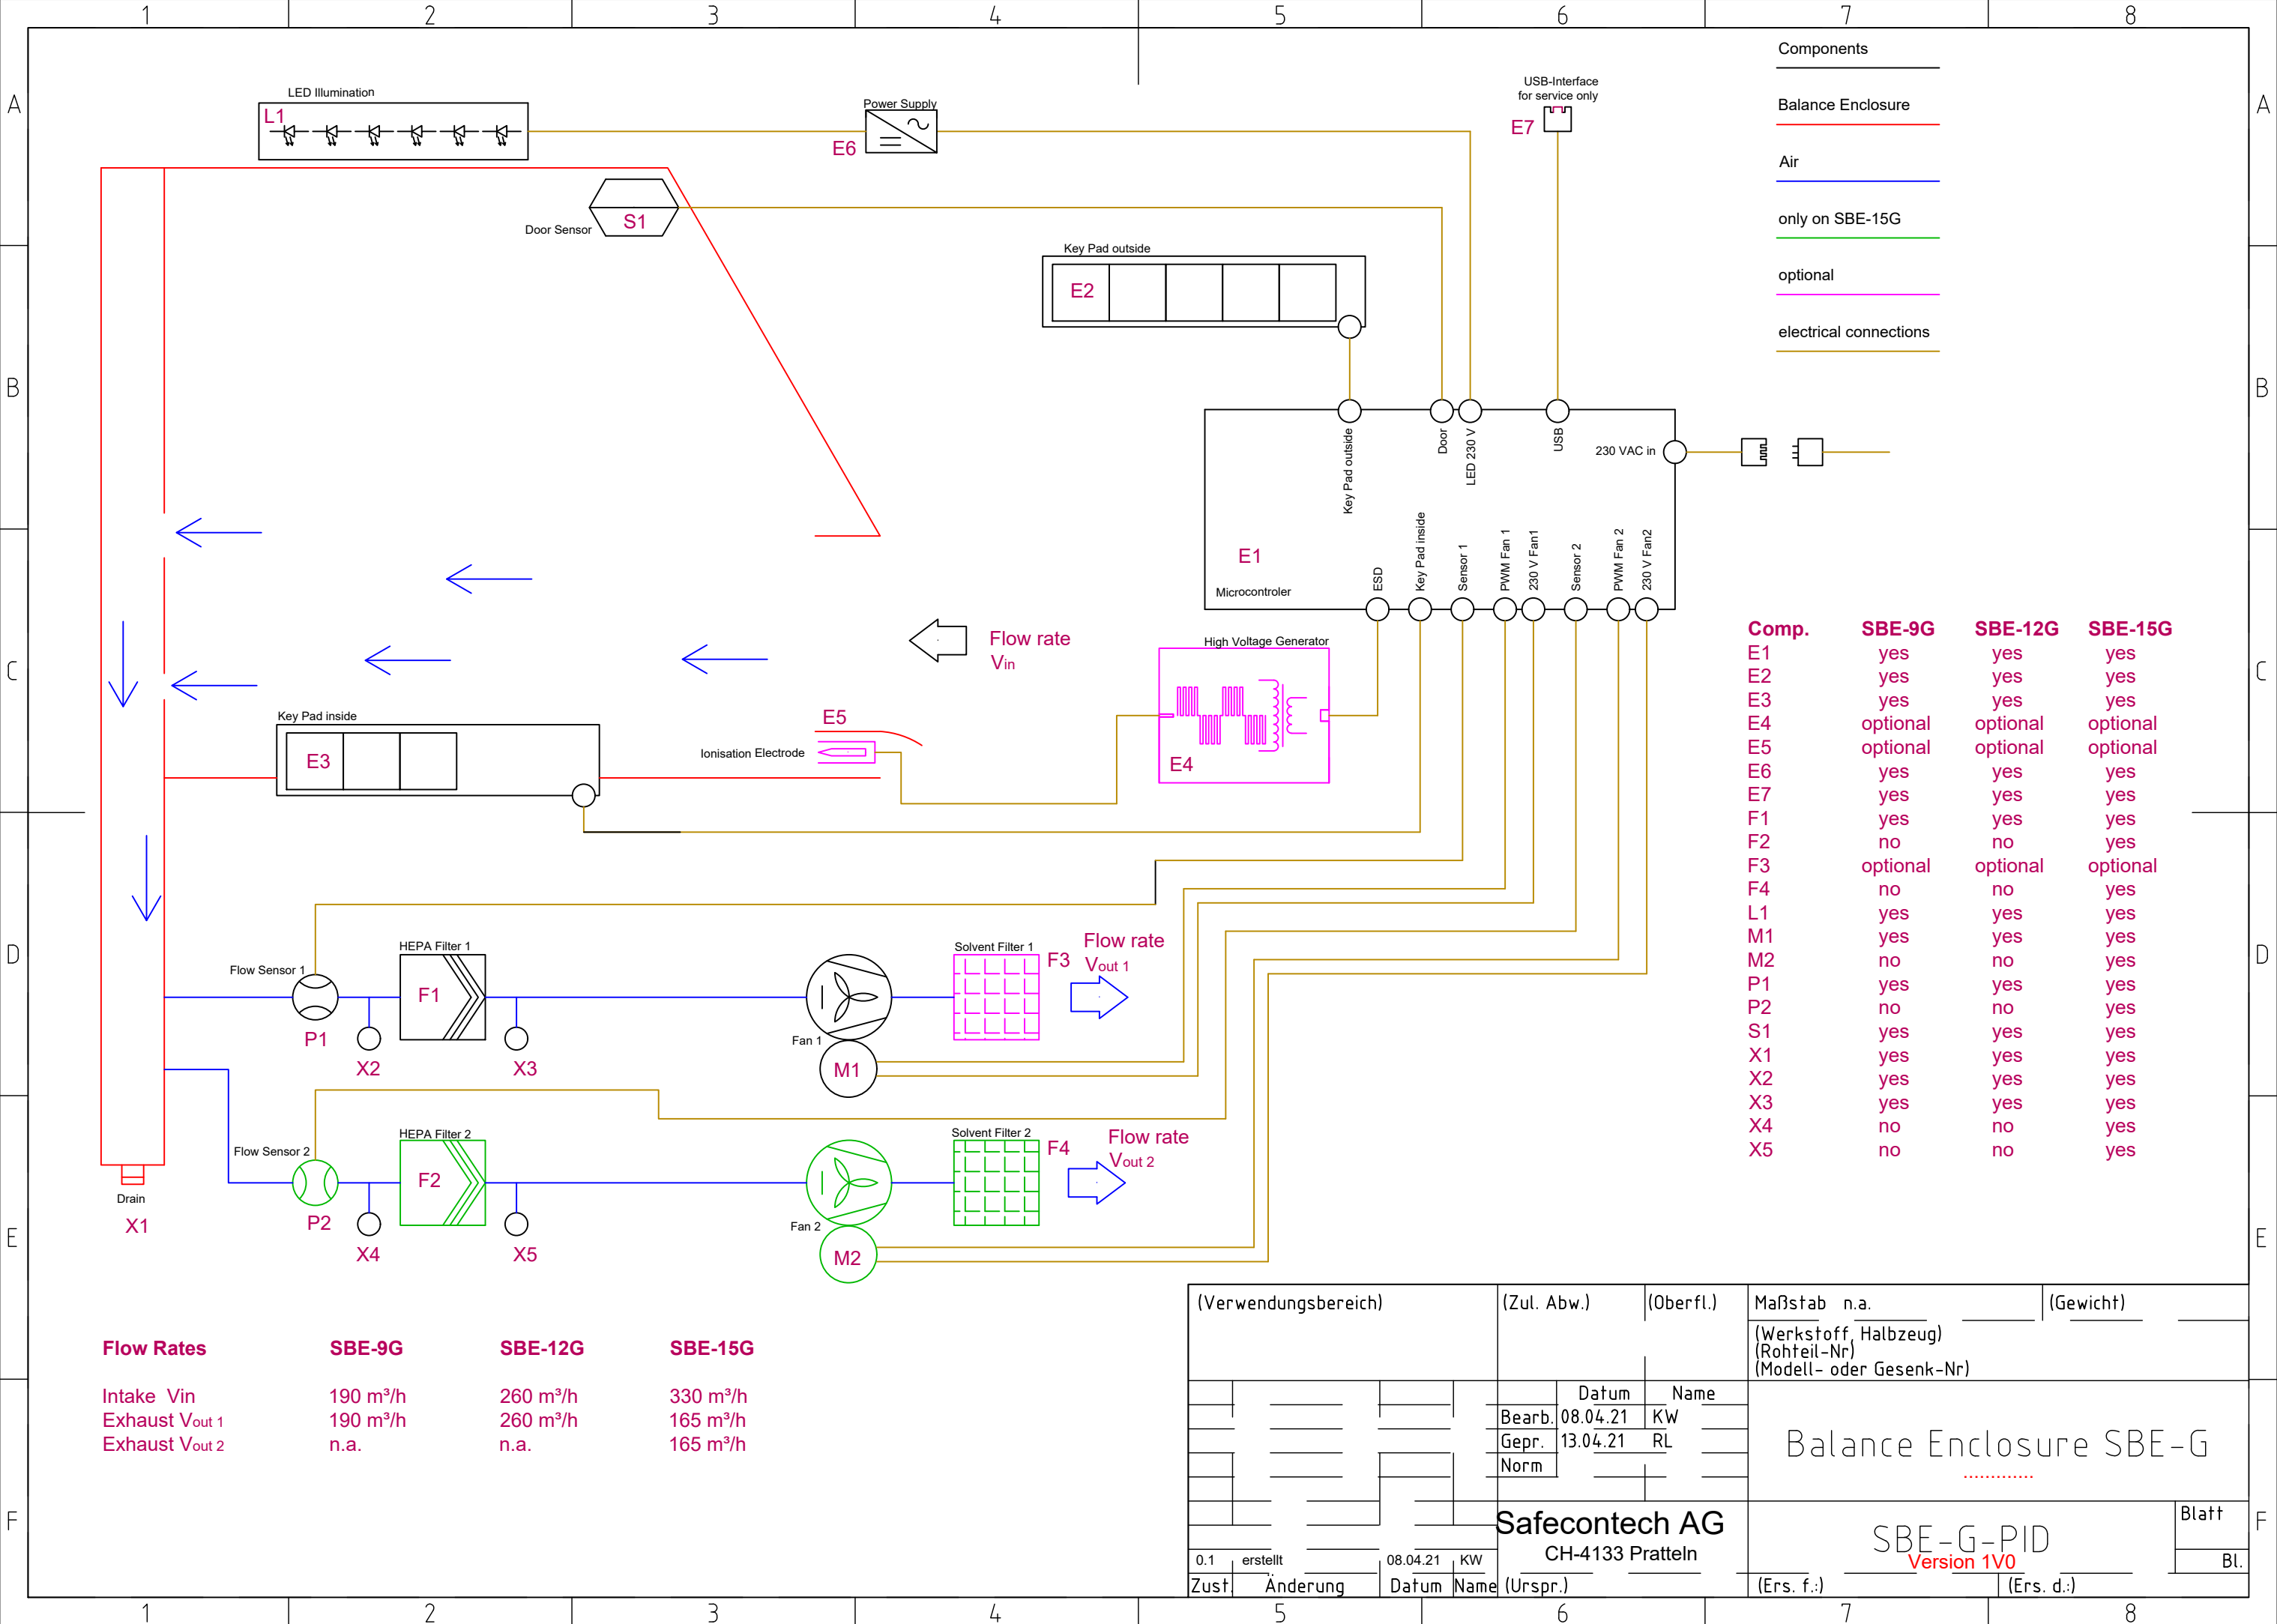

- Components
- Balance Enclosure
 - Air
 - only on SBE-15G
 - optional
 - electrical connections

Comp.	SBE-9G	SBE-12G	SBE-15G
E1	yes	yes	yes
E2	yes	yes	yes
E3	yes	yes	yes
E4	optional	optional	optional
E5	optional	optional	optional
E6	yes	yes	yes
E7	yes	yes	yes
F1	yes	yes	yes
F2	no	no	yes
F3	optional	optional	optional
F4	no	no	yes
L1	yes	yes	yes
M1	yes	yes	yes
M2	no	no	yes
P1	yes	yes	yes
P2	no	no	yes
S1	yes	yes	yes
X1	yes	yes	yes
X2	yes	yes	yes
X3	yes	yes	yes
X4	no	no	yes
X5	no	no	yes

Flow Rates	SBE-9G	SBE-12G	SBE-15G
Intake V_{in}	190 m³/h	260 m³/h	330 m³/h
Exhaust $V_{out 1}$	190 m³/h	260 m³/h	165 m³/h
Exhaust $V_{out 2}$	n.a.	n.a.	165 m³/h

(Verwendungsbereich)	(Zul. Abw.)	(Oberfl.)	Maßstab n.a.	(Gewicht)
			(Werkstoff, Halbzeug) (Rohteil-Nr) (Modell- oder Gesenk-Nr)	
			Datum	Name
			Bearb. 08.04.21	KW
			Gepr. 13.04.21	RL
			Norm	
			Balance Enclosure SBE-G	
			SBE-G-PID	
			Version 1V0	
			Blatt	
			Bl.	
0.1	erstellt	08.04.21	KW	
Zust	Änderung	Datum	Name	(Urspr.)
			(Ers. f.)	(Ers. d.)

Safecontech AG
CH-4133 Pratteln